




ETI S.p.A.

List of Main Projects

EXECUTED BY ETI S.P.A.
2018-2026

01 *Gas Stations & Plants*

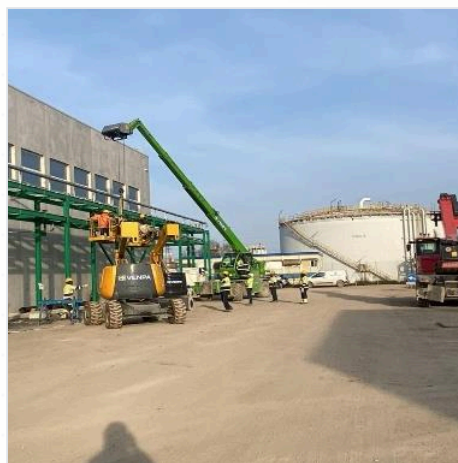

IN THIS SECTION

17 projects · 2019-2026

01 • GAS STATIONS & PLANTS

TAG Actuators and Valves Replacement SOW for Mechanical Contractor Activities CS-B Construction Execution Plan

📅 YEAR 2025	📍 LOCATION Baumgarten, Austria	🏢 CLIENT TAG Gmbh
ROLE Mechanical Contractor	MAIN CONTRACTOR TAG Gmbh	CONTRACT VALUE €7,015,119.78

ACTIVITIES PERFORMED BY ETI S.P.A.

Engineering activities

Temporary Construction Facilities (TCF) installation – 200VS1_HXXX-X412_Logistic Plan_43.13

Installation of new process pipes and any supports

Hydrostatic test of new process pipes, including supply of water, dewatering and disposal of hydro testing water

Painting/coating of new installations

Third party certification for the works completion to operate plant in safe way

Dismantling of existing possible valves, pipes and supports as per project documents and for necessities noticed after excavation

"Red marked" drawings and "AS BUILT" project drawings



01 • GAS STATIONS & PLANTS

Mechanical Works at TAG Compressor Station Eggendorf (Project Reverse Flow CS-E)

📅 YEAR 2026	📍 LOCATION Eggendorf, Germany	🏢 CLIENT TAG Gmbh
ROLE Mechanical Contractor	MAIN CONTRACTOR ETI S.p.A	CONTRACT VALUE €898,463.76

ACTIVITIES PERFORMED BY ETI S.P.A.

- Lifting activities coordination
- Manual welding for both prefabrication and field activities
- NDT activities coordination
- Coating activities according to client specifications
- Piping supports supply, construction, installation and painting
- Flange management
- Hydrostatic testing
- Pre-commissioning activities
- Indirect resources: Site Manager, Construction Manager, HSE, QA/QC & WI



01 · GAS STATIONS & PLANTS

Piping Plant, BIO Platform, Recovery Company Eni Rewind S.p.A. c/o the Ponticelli (RA)

📅 YEAR 2025	📍 LOCATION Ponticelli, Ravenna (RA), Italy	🏢 CLIENT SOLESI Spa
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Eni Rewind S.p.A	CONTRACT VALUE €1,116,679.00

ACTIVITIES PERFORMED BY ETI S.P.A.

Drinking water pipes: prefabrication and installation of pipes in galvanized pipe, and laying of HDPE PE 100 pipes to UNI EN 12201 with flanks and backfilling

Industrial water, compressed air duct, rainwater, civil wastewater and fire prevention pipes

Installation of submerged apples (excluding connection to the switchboard local area)

Assembly of supports already painted and in ready-for-erection condition

Prefabrication and installation of Tube A 106 Gr B, and of compressed air pipes in stainless steel ASTM A 312 TP 316

Pipes drainage bioremediation

Indirect resources: Site Manager, Construction Manager, HSE, QA/QC & WI




01 · GAS STATIONS & PLANTS

Modernization of Malborghetto's Compressor Station Plant

📅 YEAR 2025	📍 LOCATION Malborghetto (UD), Italy	🏢 CLIENT SNAM RETE GAS Spa
ROLE Mechanical Subcontractor	MAIN CONTRACTOR JV Renco Spa – MAN Energy Solutions	CONTRACT VALUE €652,508

ACTIVITIES PERFORMED BY ETI S.P.A.

- Lifting activities coordination
- Manual welding for both prefabrication and field activities
- NDT activities coordination
- Coating activities according to client specifications
- Piping supports supply, construction, installation and painting
- Flange management
- Hydrostatic testing
- Dewatering and drying of pipes after hydrotesting
- Flushing the refrigerant lines between the VFDs and the unit heaters
- Installation of air ejectors and extractors at compressor buildings
- Drafting out of red mark-up drawings
- Pre-commissioning activities
- Indirect resources: Site Manager, Construction Manager, HSE, QA/QC & WI

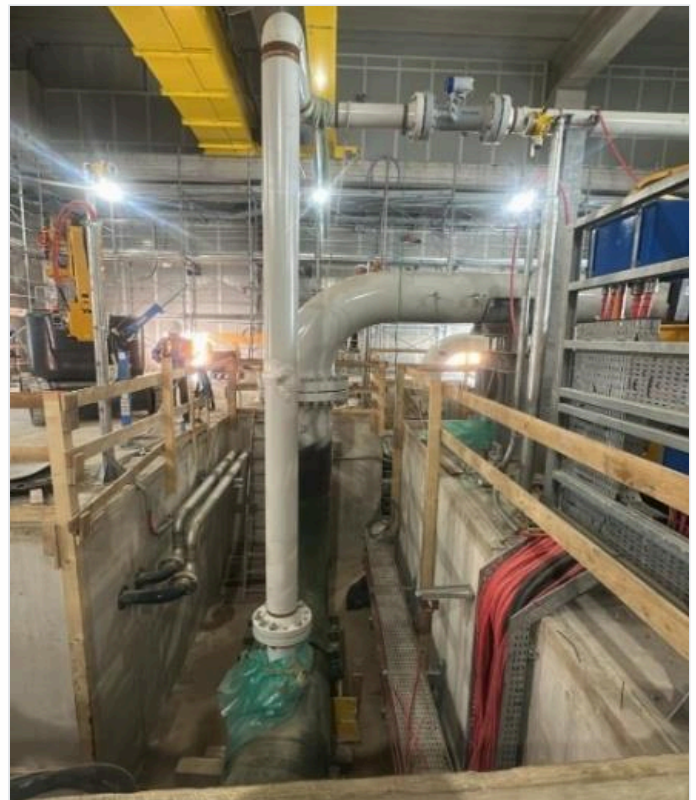

01 • GAS STATIONS & PLANTS

Construction of a New Rigid Plastics Recovery Plant

📅 YEAR 2025/26 (site works starting November 2025)	📍 LOCATION Modena, Italy	🏢 CLIENT Aliplast S.p.A.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Impes Service S.p.A.	CONTRACT VALUE €700,000

Construction of a new rigid plastics recovery plant at the Modena industrial site, funded by the European Union under NextGenerationEU. Sub-contract for the supply and installation of mechanical works serving the plant, including the mechanical interconnecting between process packages and industrial fluid/instrument air distribution manifolds, at the Aliplast SpA industrial complex in Modena.

ACTIVITIES PERFORMED BY ETI S.P.A.

- Supply of materials, piping, valves, collars, gaskets, nuts and stud bolts
- Painting of all materials in accordance with project specifications
- Manual welding, carbon steel, for stations prefabrication and erection
- Non-destructive testing
- Flange management (installation and torquing)
- Installation of line valves
- Pneumatic testing
- Insulation of the interconnecting piping to external machines
- Supply of mobile elevated work platform
- As-built isometric survey
- Indirect resources: Construction and Site Manager, etc.



01 • GAS STATIONS & PLANTS

TAG Automation Reverse Flow MSAR (Arnoldstein)

YEAR 2025	LOCATION Arnoldstein, Austria	CLIENT TAG GmbH
ROLE Mechanical Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €780,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Valves and actuators substitution during plant shut-down
- New by-passes installation
- Manual welding, carbon steel, for stations prefabrication and erection
- Non-destructive testing
- Flange management (installation and torquing)
- Actuators disassembly and re-assembly
- Hydrotest and dewatering
- Coating and painting
- Scaffolding installation
- Plant decompression, purging and recompression with nitrogen
- Third-party plant certification



01 · GAS STATIONS & PLANTS

TAG Actuators and Valves Replacement CS-B 2025

📅 YEAR 2024	📍 LOCATION Baumgarten, Austria	🏢 CLIENT TAG GmbH
ROLE Mechanical Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €1,830,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Valves and actuators substitution during plant shut-down
- New by-passes installation
- Manual welding, carbon steel, for stations prefabrication and erection
- Non-destructive testing
- Flange management (installation and torquing)
- Actuators disassembly and re-assembly
- Hydrotest and dewatering
- Coating and painting
- Scaffolding installation
- Plant decompression, purging and recompression with nitrogen
- Third-party plant certification



01 • GAS STATIONS & PLANTS

Hot-Tapping 2025

Technical appendix to TAG Actuators and Valves Replacement CS-B 2025

 YEAR 2024	 LOCATION Baumgarten, Austria	 CLIENT TAG GmbH
ROLE Mechanical Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €130,000.00


TECHNICAL DATASHEET	HEADER PIPELINE INFO	MEDIUM IN PIPELINE	EQUIPMENT
Application: Hot-Tap with LOR Plus Purpose: Installation Tie-In Nr/Ref, Gasbag insertion, Quantity	Piping Class 15A Nominal size 36" Nominal wall thickness 17.5–20 mm Material L450ME Orientation horizontal Fitting: LOR Plus Nipple, 8" Class 600	Content: natural gas / out of service Max. operating pressure: no pressure Max. operating temperature: ambient Max. flow during intervention: no flow	Hot-Tap Machine: TM-660 or 760 Valve: sandwich valve 8"-600 Power: compressed air Location: TAG pressure station, underground or above ground

Full material certificates, macro-etch inspection records and the welding log for this hot-tap are on the following page.

01 · GAS STATIONS & PLANTS

Hot-Tapping 2025 (continued)

Quality documentation: material certificates, macro-etch inspection and welding log for the hot-tap execution.

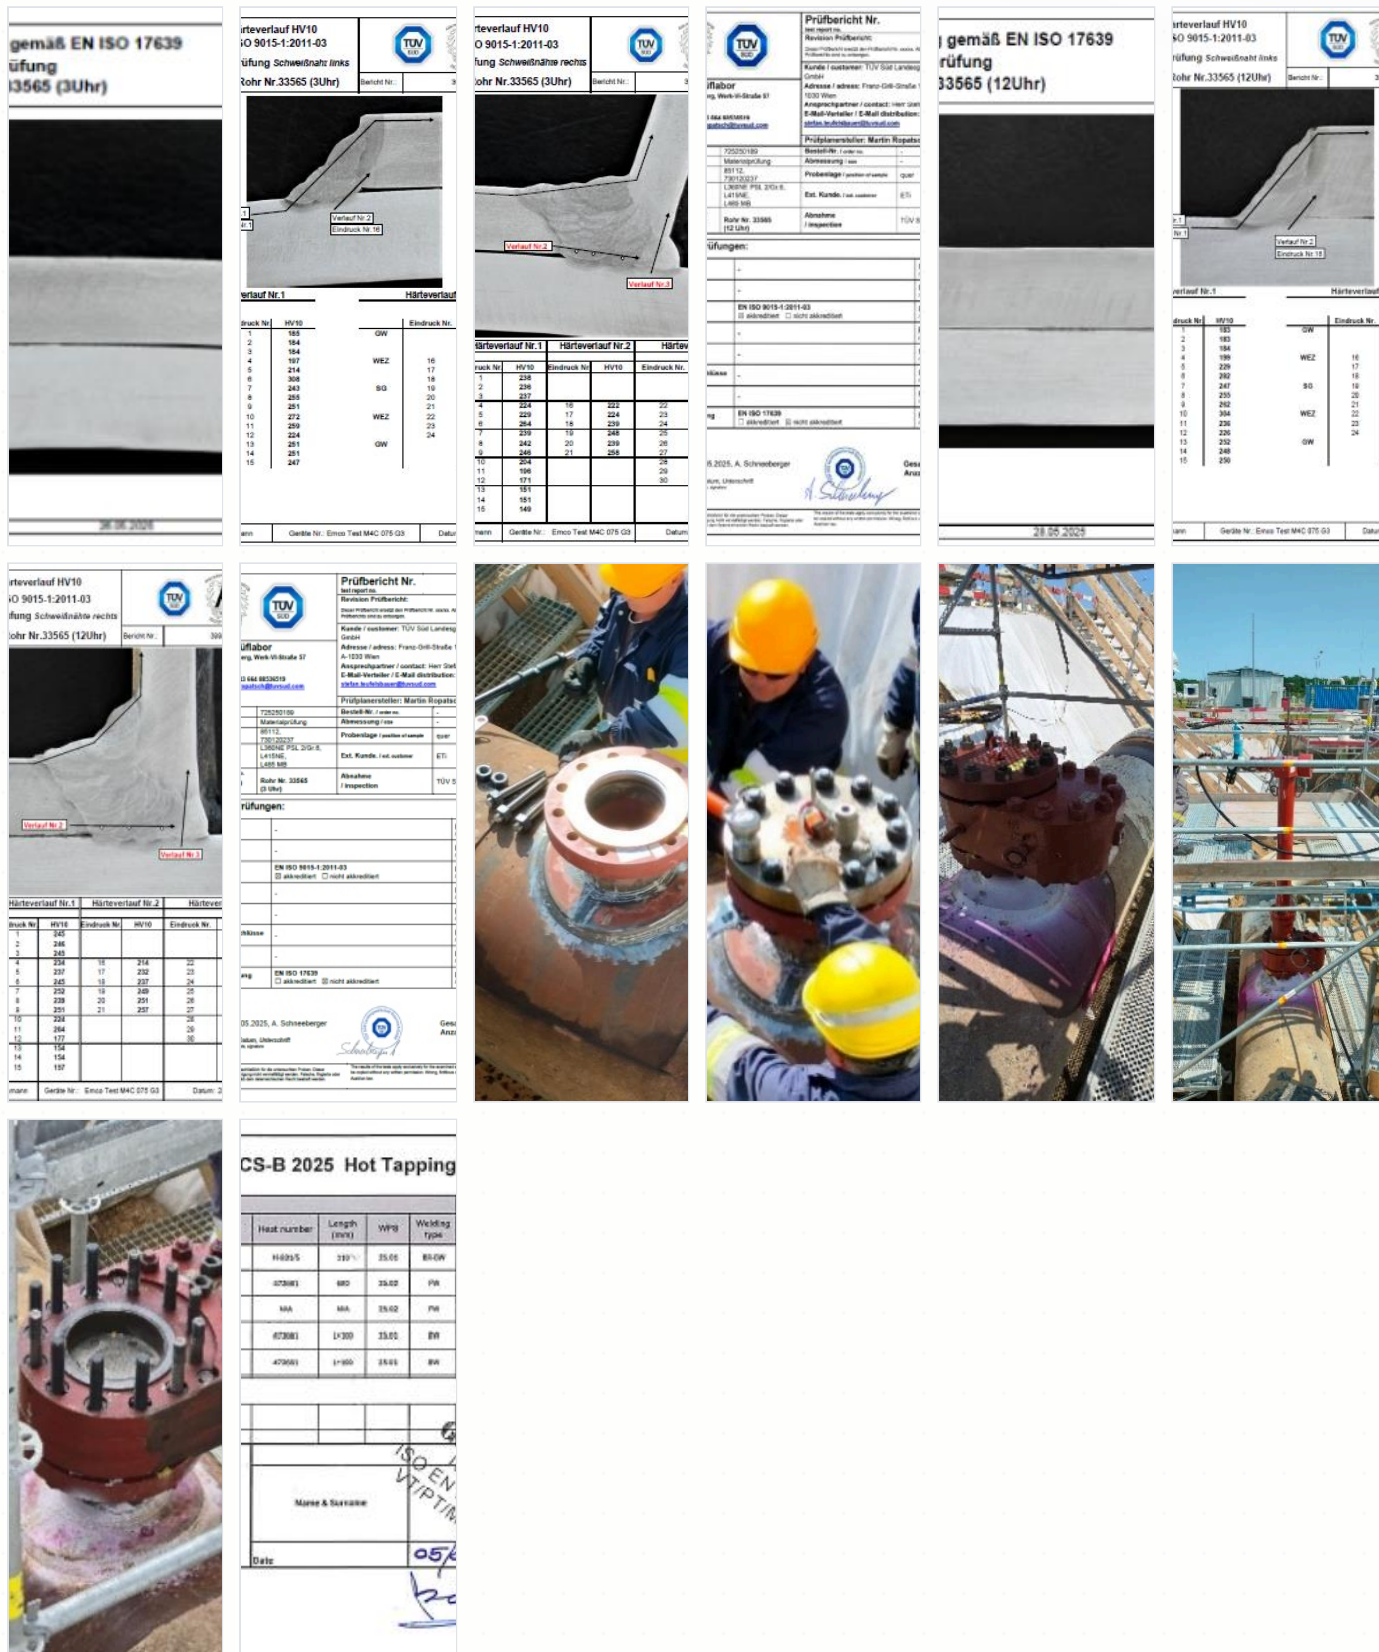

01 · GAS STATIONS & PLANTS

VA Project, Compressor Station Eggendorf

📅 YEAR 2024	📍 LOCATION Eggendorf, Austria	🏢 CLIENT TAG GmbH
ROLE Mechanical Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €600,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Valves and actuators substitution during plant shut-down
- New by-passes installation
- Manual welding, carbon steel, for stations prefabrication and erection
- Non-destructive testing
- Flange management (installation and torquing)
- Actuators disassembly and reassembly
- Hydrotest and dewatering
- Coating and painting
- Scaffolding installation
- Plant decompression, purging and recompression with nitrogen
- Third-party plant certification



01 · GAS STATIONS & PLANTS

VA Project, Compressor Station Grafendorf

📅 YEAR 2024	📍 LOCATION Grafendorf, Austria	🏢 CLIENT TAG GmbH
ROLE Mechanical Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €3,000,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Valves and actuators substitution during plant shut-down
- New by-passes installation
- Manual welding, carbon steel, for stations prefabrication and erection
- Non-destructive testing
- Flange management (installation and torquing)
- Actuators disassembly and reassembly
- Hydrotest and dewatering
- Coating and painting
- Scaffolding installation
- Plant decompression, purging and recompression with nitrogen
- Third-party plant certification




01 · GAS STATIONS & PLANTS

SCS & VA Project, Compressor Station Baumgarten

📅 YEAR 2023	📍 LOCATION Baumgarten an der March, Austria	🏢 CLIENT Trans Austrian Gasleitung GmbH
ROLE Mechanical Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €2,000,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Valves and actuators substitution during plant shut-down
- New by-passes installation
- Manual welding, carbon steel, for stations prefabrication and erection
- Non-destructive testing
- Flange management (installation and torquing)
- Actuators disassembly and reassembly
- Hydrotest and dewatering
- Coating and painting
- Scaffolding installation
- Plant decompression, purging and recompression with nitrogen
- Third-party plant certification

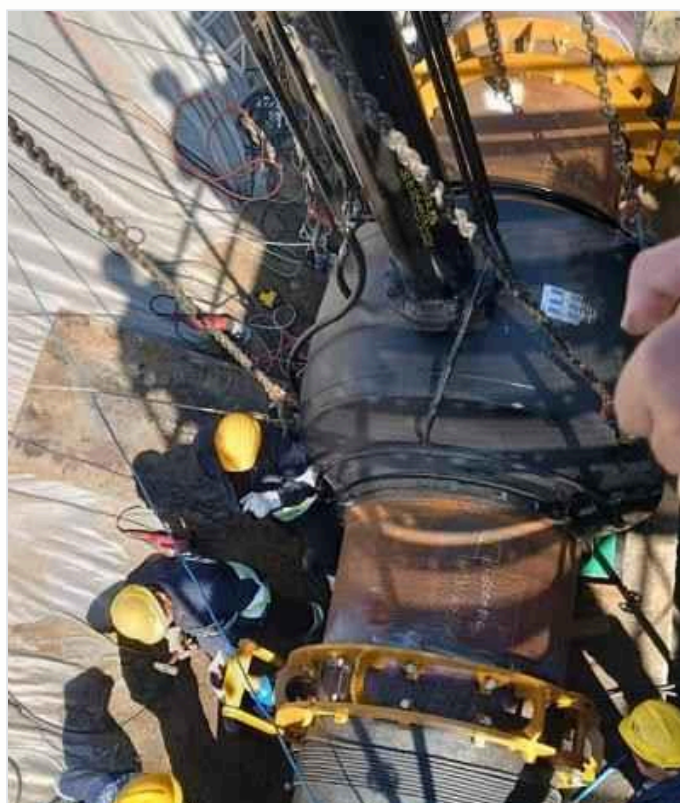

01 • GAS STATIONS & PLANTS

Plaquemines 2 Project, N.3 LNG Megamodules Construction

📅 YEAR 2024	📍 LOCATION Avenza-Massa Carrara, Italy (final place: Louisiana, USA)	🏢 CLIENT Baker Hughes (final customer: Venture Global LNG)
ROLE Mechanical Contractor	MAIN CONTRACTOR RAM (Contractor)	CONTRACT VALUE €4,500,000.00

The Plaquemines project (part of Venture Global LNG) consists of the construction of 18 Mega Modules, each of 2 modules, for the treatment of LNG to be installed at the production site in Louisiana, USA. Module construction is carried out at the Baker Hughes yard in Avenza (Carrara, MS). The scope of work of ETI SpA is the erection of piping, equipment, valves and supports for 3 modules, over a duration of 18 months (Feb 2024–Aug 2025).

Piping weight	182,000 kg per module , 546,000 kg total
Piping range	½" up to 42"
Supports weight	9,000 kg per module , 27,000 kg total
Valves weight	39,000 kg per module , 117,000 kg total
Equipment weight	340,000 kg per module , 1,020,000 kg total
Welding	4,500" per module , 13,500" total inches
Peak workload	60 resources

ACTIVITIES PERFORMED BY ETI S.P.A.

Indirect resources: Site Engineer, Quality Engineer, Construction and Site Manager, HSE, etc.



01 • GAS STATIONS & PLANTS

Plaquemines 2 Project, N.3 LNG Megamodules Construction (continued)



Front view of the module during transportation



Detail: fit-up, pipe 42"



Overview: second-floor piping during installation

01 · GAS STATIONS & PLANTS

ARGE LNG Brunsbüttel Project, Phase 1, DN600

📅 YEAR 2022	📍 LOCATION Brunsbüttel, Germany	🏢 CLIENT Gasunie Deutschland Transport Services GmbH
ROLE Mechanical Subcontractor	MAIN CONTRACTOR PPS Pipeline Systems GmbH	CONTRACT VALUE €500,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Manual welding, carbon steel, for stations prefabrication and erection
- Flange management
- Hydrotest and dewatering
- Manual welding of pipeline connection welds DN 600



01 · GAS STATIONS & PLANTS

RAG Project, DN700

📅 YEAR 2022	📍 LOCATION Überackern, Austria	🏢 CLIENT R.A.G. Austria
ROLE Mechanical Subcontractor	MAIN CONTRACTOR PPS Pipeline Systems GmbH	CONTRACT VALUE €450,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Manual welding, carbon steel, for line valve stations prefabrication and erection
- Flange management
- Stringing activity on pipeline DN 700
- Manual welding of pipeline welds (mainline and connections) DN 700
- Tie-ins with existing plant



01 · GAS STATIONS & PLANTS

Baltic Pipe Project, Gołeniów Compressor Station, DN1000

📅 YEAR 2021	📍 LOCATION Gołeniów, Poland	🏢 CLIENT Gaz-System
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Max Streicher S.p.A.	CONTRACT VALUE €6,270,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Welding piping prefabrication and erection, carbon steel
- Welding piping prefabrication and erection, stainless steel including pickling
- Tie-ins with existing plant
- Coating activities
- Painting activities
- Pressure test, blowing and drying activities
- Piping insulation
- Pre-commissioning activities



01 · GAS STATIONS & PLANTS

Capacity 4 Gas Extension Project, DN1400

YEAR 2020	LOCATION Plzen, Czech Republic	CLIENT Net4Gas s.r.o.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Sicim S.p.A.	CONTRACT VALUE €1,560,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Manual welding for LVS and pig-trap station construction (prefabrication and erection) DN 1400
- Underground coating activities
- Aboveground painting activities
- Assistance to hydrotest
- Flange management



01 · GAS STATIONS & PLANTS

ARGE Zeelink LOS 4 Plus Project, DN1000


📅 YEAR 2019	📍 LOCATION Duisburg, Germany	🏢 CLIENT O.G.E
ROLE Mechanical Subcontractor	MAIN CONTRACTOR PPS Pipeline Systems GmbH	CONTRACT VALUE €1,810,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Manual welding for BVS and pig-trap station construction (prefabrication and erection) DN 1000
- Underground coating activities
- Aboveground painting activities
- Assistance to hydrotest
- Flange management



02 *Gas Pipelines*

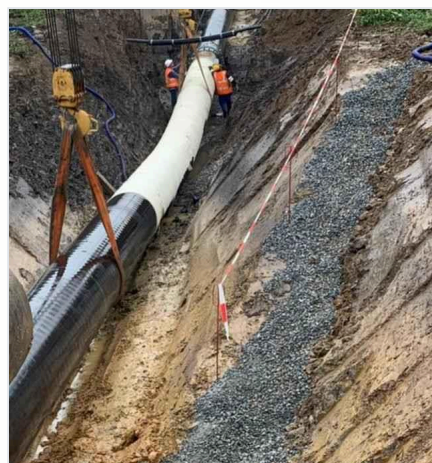

IN THIS SECTION

7 projects · 2018-2026


02 • GAS PIPELINES

Manual Welding Services in EWA Project

📅 YEAR 2025	📍 LOCATION Etzel-Wardenburg, Abzweig Friederburg, Bockhorn, Wiefelstede, Germany	🏢 CLIENT OGE Open Grid Europe GmbH
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Max Streicher Germany	CONTRACT VALUE €1,545,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Cutting
- Assembly and all involved diameters spool
- Prefabrication
- Erection including torquing activities
- Flange management
- Preparation of red mark-up and as-built documents

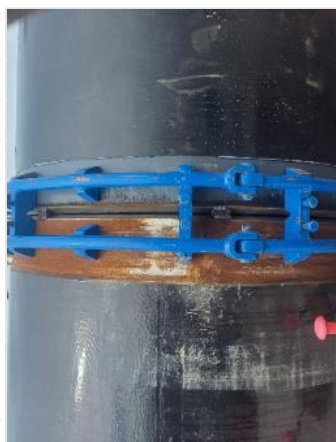

02 · GAS PIPELINES

EUGAL Project, Lose 9-10-11, DN1400

📅 YEAR 2018	📍 LOCATION Großenhain, Germany	🏢 CLIENT GASCADE Gastransport GmbH
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Bonatti S.p.A.	CONTRACT VALUE €1,785,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Manual welding for BVS and pig-trap station construction (prefabrication and erection) DN 1400
- Underground coating activities
- Aboveground painting activities
- Assistance to hydrotest
- Flange management




02 • GAS PIPELINES

Moravia Capacity Extension Project, DN1000

📅 YEAR 2022	📍 LOCATION Brno, Czech Republic	🏢 CLIENT Net4Gas s.r.o.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR PPS Pipeline Systems GmbH	CONTRACT VALUE €2,575,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Manual welding of pipeline connection welds DN 1000 (3 teams on site)
- Coating of mainline welds DN 1000
- Coating of connection welds DN 1000
- Manual welding, carbon steel, for line valve stations prefabrication and erection DN 1000

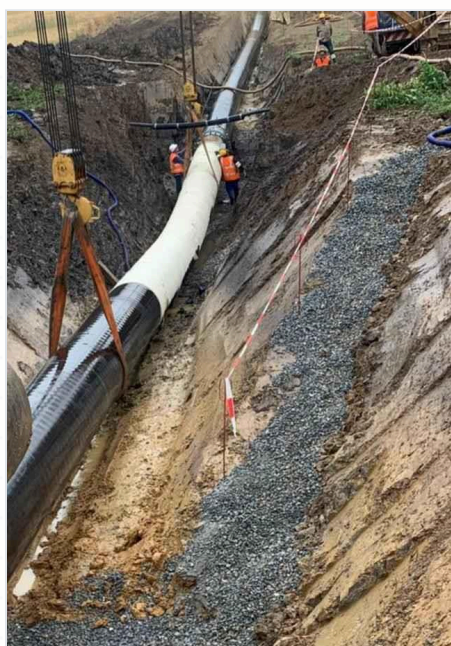

02 · GAS PIPELINES



ITALGAS RETI SALERNO_POSTIGLIONE

YEAR 2026	LOCATION Brindisi, Italy	CLIENT ITALGAS
ROLE General Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €2,785,911.87

The works involve the construction of approximately 9.7 km of PE MPB (Class IV) network and approximately 2.8 km of PE MPA (Class VI) network: 1,488 m in the Municipality of Serre (incl. 1x IMPV4/a); 6,564 m in the Municipality of Postiglione (incl. 1x GRIM9, 2x IRID3, remediation and decommissioning of the existing LPG plant, removal of 266 m of LPG network); 973 m in the town centre of Postiglione (incl. removal of one GRF1 unit and 66 m of existing LPG network); 1,777 m of network for the new natural gas supply to the hamlet of Terzo di Mezzo; and 1,775 m of network for the new natural gas supply to the hamlets of Acquara and Pescara.

ACTIVITIES PERFORMED BY ETI S.P.A.

- Construction of the gas network
- Partial removal of the existing LPG network and systems
- Remediation and redevelopment of the site currently housing the central LPG plant
- Construction of the IDU (User Delivery Unit)
- Laying of fibre-optic infrastructure
- Installation of IRCs (customer connection units) supplied by the client (1x IMPV4/a, 2x IRID3, 1x GRIM9)
- Standard final restoration works

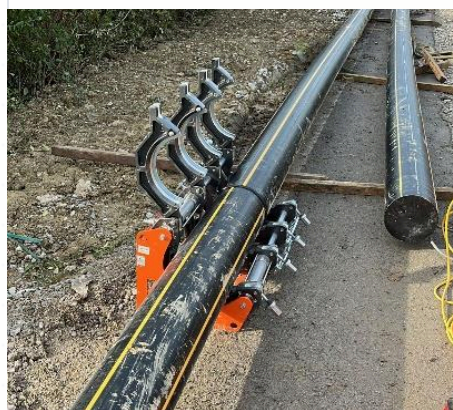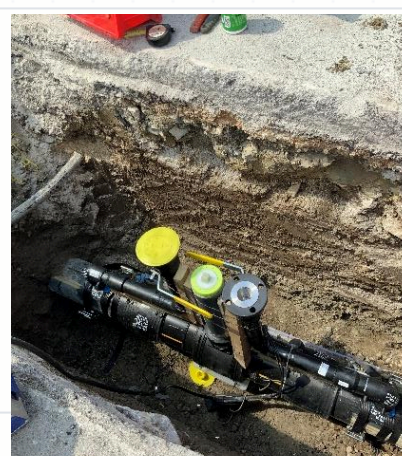

02 • GAS PIPELINES


Baltic Pipe Project, Pipeline DN1000 and DN900

📅 YEAR 2021	📍 LOCATION Prusinowo, Poland	🏢 CLIENT Gaz-System
ROLE Mechanical Subcontractor	MAIN CONTRACTOR PPS Pipeline Systems GmbH	CONTRACT VALUE €1,135,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

Manual welding of pipeline connection welds DN 1000

Manual welding of pipeline connection welds DN 900

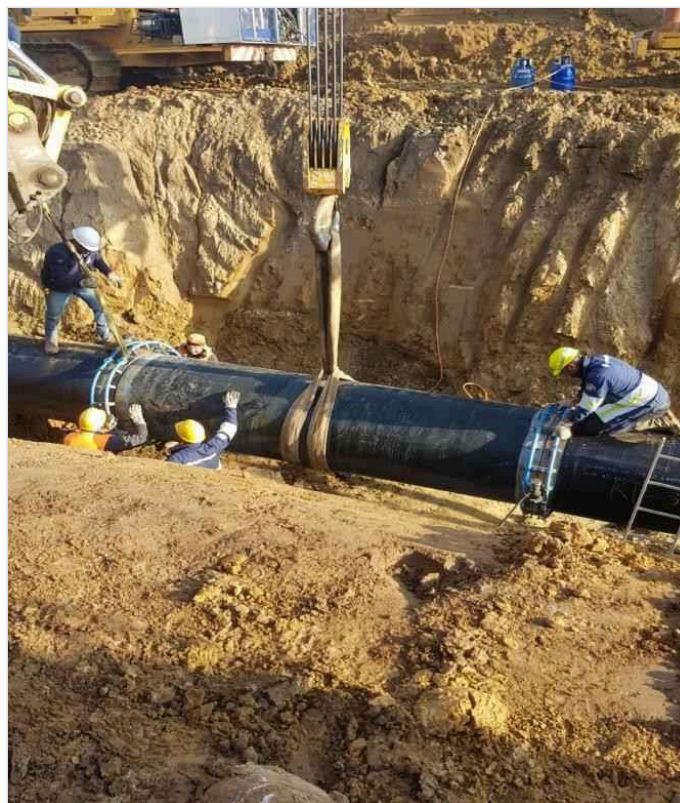


02 • GAS PIPELINES

EUGAL Project, Lose 1 und 2, DN1400

📅 YEAR 2018	📍 LOCATION Anklam, Germany	🏢 CLIENT GASCADE Gastransport GmbH
ROLE Mechanical Subcontractor	MAIN CONTRACTOR PPS Pipeline Systems GmbH	CONTRACT VALUE €5,790,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Manual welding of pipeline connection welds DN 1400
- Coating activities DN1400
- Final tie-ins DN1400

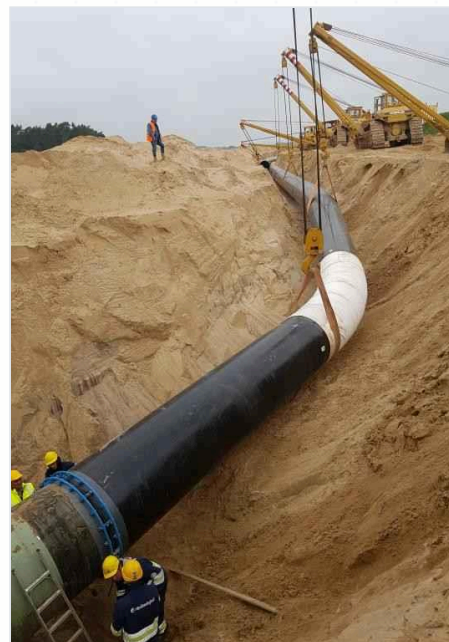

02 • GAS PIPELINES

Extension of HDPE Gas Infrastructure

 YEAR 2024-2025	 LOCATION Ponte Nelle Alpi (BL), Italy	 CLIENT ITALGAS S.p.A.
ROLE General Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €2,282,330.00

All the necessary planning, management and execution of civil and mechanical activities to install a new HDPE gas pipeline inside the city, including subcontractors management.



03 *Hydrogen Pipelines*



IN THIS SECTION

1 project · 2026-2026

Welding and Installation of Main Pipeline DN400 and Transmission Line DN300, Section Bruck an der Mur – St. Michael / Traboch

YEAR 2026	LOCATION Germany	CLIENT Max Streicher
ROLE General Contractor	MAIN CONTRACTOR ETI S.p.A	CONTRACT VALUE €3,750,875

Mechanical works


Bending

Main line welding


Coating

Lowering

Tie-ins and special points welding

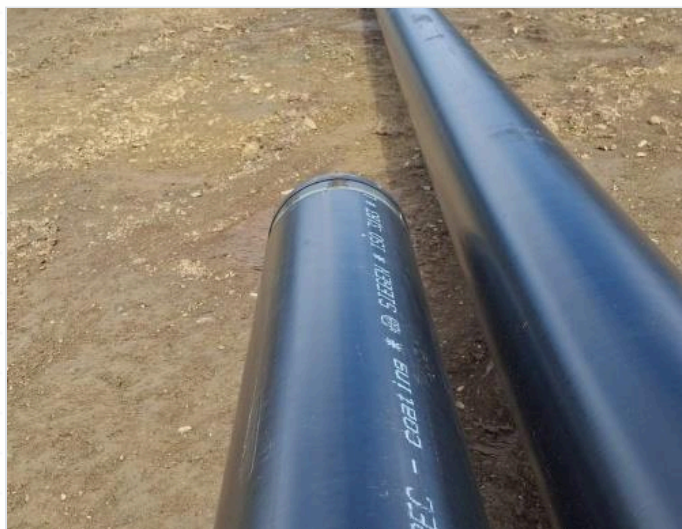

04 *Water Pipelines*

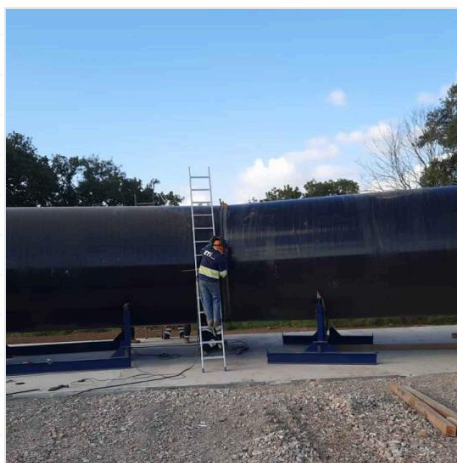

IN THIS SECTION

9 projects · 2023-2026

04 • WATER PIPELINES

Construction of the Desalination Plant for the Brackish Water of the Tara Springs

CUP E5 7B13000310005, CIG 9738163A52

📅 YEAR 2026	📍 LOCATION Italy	🏢 CLIENT Acquedotto CISA Taranto
ROLE General Contractor	MAIN CONTRACTOR ETI S.p.A	CONTRACT VALUE €1,424,634.53

ACTIVITIES PERFORMED BY ETI S.P.A.

- Unloading and removal of steel pipes DN900
- Electrode welding of DN900 steel pipes (with licensed welders)
- Realization of weld protection
- Excavation and construction of a laying bed with suitable material
- Material transport for the laying bed
- Installation in previously completed excavation (average depth 3.5 m)
- Refilling of the excavated trenches



04 • WATER PIPELINES

Resolutions of Water and Sewage Interferences in the Context of the Railway Doubling Works of the Messina-Catania Section

North lot (Giampilieri-Taormina)

 YEAR 2024/2025	 LOCATION Messina, Italy	 CLIENT Consorzio MECT Lotto Nord (WeBuild S.p.A. – Pizzarotti S.p.A. – Partecipazioni Italia S.p.A.)
ROLE General Contractor	MAIN CONTRACTOR ETI S.p.A.	CONTRACT VALUE €4,520,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Supply of pipes, hydraulic equipment and special parts
- Excavation and laying of coated steel pipe DN 700–DN 1000
- Execution of reinforced concrete works (anchor blocks, inspection wells, box sections for road crossings)
- Supply and installation of trusses (tube bridge)



04 • WATER PIPELINES



Messa in Sicurezza ed Ammodernamento del Sistema Idrico del Peschiera

Adduttrice Ottavia Trionfale DN 2000/2500, water pipeline, length 5,000 m

📅 YEAR 2024/2025	📍 LOCATION Roma, Italy	🏢 CLIENT ACEA S.p.A.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR ATI Ottavia Trionfale (Vianini Spa – Monaco Spa – Ircop Spa)	CONTRACT VALUE €3,040,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Manual welding of pipeline DN 2500 and DN 2000
- Coating of mainline welds and connection welds DN 2500 and DN 2000
- Micro tunneling and trenchless
- Lowering-in the trench
- Cold bends realization (slice bends)

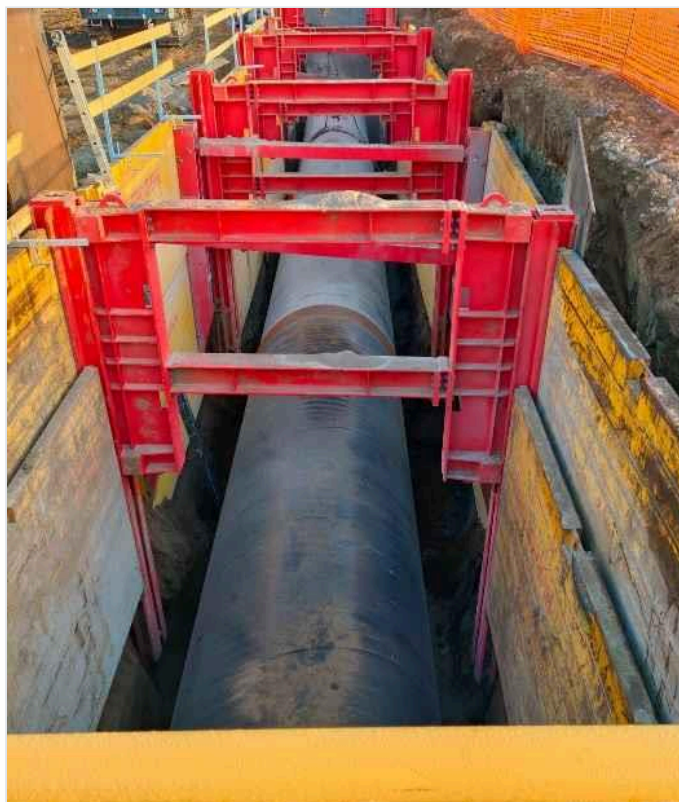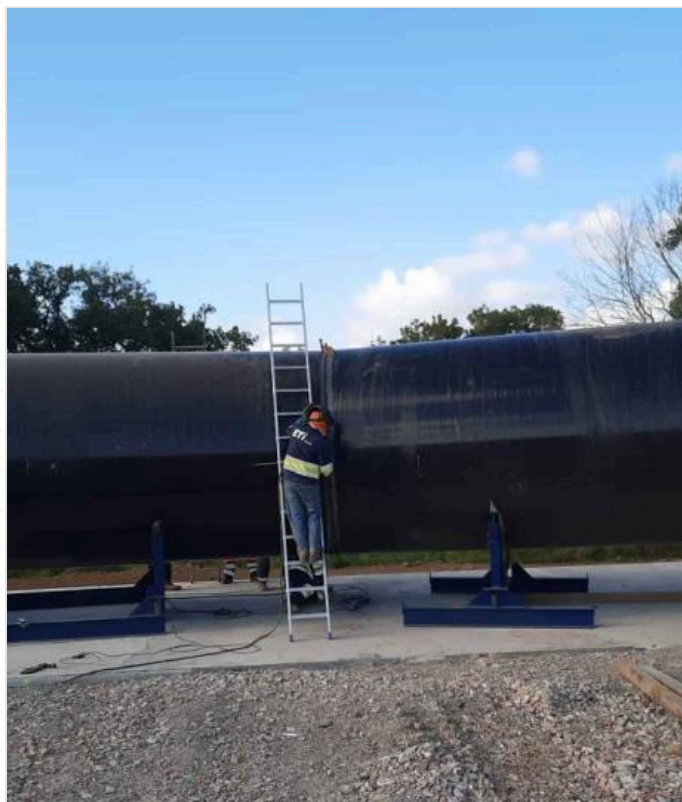

04 • WATER PIPELINES

Acquedotto del Locone II Lotto, DN1000 and DN1200

Length 48,000 m

YEAR 2024/2025	LOCATION BAT, Bari, Italy	CLIENT Acquedotto Pugliese S.p.A.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR A.T.I. Cobar – Faver – Simeone	CONTRACT VALUE €5,500,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Pipeline stringing DN 1000 and DN 1200
- Main line semi-automatic welding DN 1000 and DN 1200
- Manual welding of pipeline connection welds DN 1000 and DN 1200
- Coating of mainline welds and connection welds DN 1000 and DN 1200
- Micro tunneling and trenchless
- Lowering-in the trench
- Hydrotest on pipelines
- Cold bends realization (slice bends)
- Line valve stations realization



04 · WATER PIPELINES

Subsea Water Pipeline Extension for Sewage Treatment Plant

South of Italy (Bari), DN 1200 and DN1000

 YEAR 2023/25	 LOCATION Bari, Italy	 CLIENT Acquedotto Pugliese S.p.A.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR A.T.I. Sub Technical Edil Services Srl – Faver S.p.A.	CONTRACT VALUE €600,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

Pipeline onshore fabrication: pipe stringing on dedicated rolls DN 1000 and DN 1200

Manual welding of pipeline connection welds DN 1000 and DN 1200

Coating of DN 1000 and DN 1200 welds, and coating isotest

Application of concrete weighting on the welded joints

Installation of P.E. floatings

Installation and torquing of pulling heads

Assistance during the submarine pipeline launching in the sea



04 • WATER PIPELINES

Erection Design and Construction of Water Pipeline

South of Italy, DN 3000

📅 YEAR 2023	📍 LOCATION Ginosa, Italy	🏢 CLIENT Acquedotto Pugliese S.p.A.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Faver S.p.A. – Cobar S.p.A.	CONTRACT VALUE €790,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Pipeline stringing DN 3000
- Manual welding of pipeline connection welds DN 3000, on the ground and in quote
- Coating of mainline welds and connection welds DN 3000
- Isotest and lifting of the pipes on the concrete supports
- Installation of pipeline supports
- Final connections with existing pipeline



04 • WATER PIPELINES

Design and Construction of Water Pipeline

DN 1400, DN 800 and DN 500

📅 YEAR 2023	📍 LOCATION Spello (PG), Italy	🏢 CLIENT Ente Acque Umbro Toscane S.p.A.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Tecnostrade S.r.l.	CONTRACT VALUE €2,000,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Pipeline stringing DN 1400, DN 800 and DN 500
- Manual welding of pipeline connection welds DN 1400, DN 800 and DN 500
- Coating of welded joint DN 1400, DN 800 and DN 500, and coating isotest
- Lowering-in and connection welds

- Hydro test on pipelines
- Dewatering
- Line valve stations realization
- Mechanical works for realization of drains, vents and sockets
- Final connections with existing infrastructure



04 • WATER PIPELINES

Construction Design for Completion and Optimization Through Size Increasing of Network Water Pipeline

Centre of Italy, DN 1000, DN 700 and DN 500

📅 YEAR 2023	📍 LOCATION Valiano, Italy	🏢 CLIENT Ente Acque Umbro Toscane S.p.A.
ROLE Mechanical Subcontractor	MAIN CONTRACTOR Krea S.p.A.	CONTRACT VALUE €1,000,000.00

ACTIVITIES PERFORMED BY ETI S.P.A.

- Pipeline stringing DN 1000, DN 700 and DN 500
- Manual welding of pipeline connection welds DN 1000, DN 700 and DN 500
- Coating of welded joints DN 1000, DN 700 and DN 500
- Coating isotest
- Lowering-in and connection welds
- Hydro test on pipelines
- Dewatering
- Line valve stations realization
- Mechanical works for realization of drains, vents and sockets
- Final connections with existing infrastructure



04 • WATER PIPELINES

Opere Meccaniche Inerente la Realizzazione del Potabilizzatore a Campolattaro (BN)

 YEAR 2026	 LOCATION Campolattaro, Italy	 CLIENT GHELLA S.p.A.
ROLE Mechanical	MAIN CONTRACTOR ETI S.p.A	CONTRACT VALUE €4,668,000

ACTIVITIES PERFORMED BY ETI S.P.A.

Supply of all piping and special parts in AISI 316, total weight 171,000 kg, with related prefabrication

Installation of prefabricated piping, including bolts and gaskets

Hydrotest on pipelines

Hydrostatic test, non-destructive testing, documental verification

Flange management

Non-hazardous waste management (D.Lgs. 152/06), reuse of plastic material where possible

HDPE: butt welding by electrofusion, preliminary and post-welding checks

Stainless steel: TIG welding, joint preparation, quality checks (visual, penetrant, RX)

05 *Naval Works*



IN THIS SECTION

1 project · 2023-2024

05 • NAVAL WORKS

Piping Construction on Cruise Ships, Fincantieri Monfalcone Yard

 YEAR 2023-2024	 LOCATION Monfalcone, Italy	 CLIENT Fincantieri S.p.A.
ROLE Mechanical Contractor	MAIN CONTRACTOR Fincantieri S.p.A.	CONTRACT VALUE €2,500,000.00

The scope of work consisted of management of project materials (pipes), installation on board, preparation for testing, testing and official delivery to the end customer of all the piping involved. Complete set-up of the section, with the assembly of the pipes related to the area systems referred to in the functional diagrams and related to the set-up sub-networks on the relevant assembly plans across positions SR 6000-7000-3000, including arrangement of all the local carpentry works: escape ladders, bases, manholes, lifting eyebolts and iron guides.

